



Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management
Thomas Dittrich
Mob: 0049-16096548808
E-mail: thomas.dittrich@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com



Folgen Sie uns auf
Instagram



Folgen Sie uns auf
Facebook



Folgen Sie uns auf
YouTube



"Hangcha Forklift"
App herunterladen



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

2025 VERSION 3/COPYRIGHT 2025/08

HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dierer Bröschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.



X Series Electric Tow Tractor

with capacities of 20,000 to 40,000kg

The World of Hangcha
SINCE 1956





Exterior

/ With a streamlined integral steel structure, a vivid stylish profile formed by a combination of large arcs and streamlined curved surfaces and a centered driving position, the vehicle is suitable for pushing operations.

Safety

- / Electric vacuum assisted braking: the double-chamber and double-pipeline all-wheel braking systems with front and rear dynamic proportional partial pressure control performs safe, stable and reliable braking. The large-capacity vacuum cylinder designed can reliably assist braking (by pumping the pedal six times) to enable higher safety when the vehicle is not powered.
 - / With the electrical main switch to perform emergency shut-off and ensure the safety of the vehicle.
 - / The S-EPS (Electric Power Steering) synchronous steering system and the synchronous steering axle operate according to road conditions to ensure straight driving and safe and reliable steering(20-32t).
 - / Double safety hook operation: the pull rod is equipped with a safety device to prevent mis-operation of the pull rod, simple but reliable and highly safe.
 - / The water resistance level of the vehicle is IPX5. Key parts (for electric control, etc.) are placed in the high position of the vehicle body to prevent road surface water from entering and ensure strong wading ability, safety and reliability.
 - / Fully hydraulic steering with transverse-cylinder steering axle for effortless operation.
- / An advanced **AC control system(80v system)** —the high-frequency integrated IMOTION controller ensures stable and accurate driving, good performance of electronic control matching the motor, and with the functions of stable starting, regenerative braking, reverse braking and anti-sliding on ramps, etc., is energy-saving and is highly safe and reliable.



Advancement

- / The AC power system provides strong power and has more precise speed regulation performance.
- / High-efficiency power system and high-performance lithium iron phosphate battery: the lithium battery is installed vertically. The battery can last for a long time.
- / The LED-screen have the functions of battery display, timer and fault self-diagnosis, without a handheld unit, maintenance and changing of the vehicle performance can be completed through the instruments. Faults are indicated in the form of a combination of codes and text, which are clearer and easier to read.
- / There are operating switches at the rear of the vehicle: front and rear jog switches and an emergency shut-off switch.
- / For the standard configuration, the vehicle is equipped with LED lights and integrated high-beam and low-beam headlights.
- / The electric parts of the vehicle are designed to be water-proof and forced air cooling is provided for electric control, where the functions of heat dissipation, ventilation, dust resistance and water resistance.



Comfort

- / With the human-machine interaction system that consists of compact and reliable novel digital multifunctional instruments and a combination rocker switch, the operations of the vehicle can be shown clearly.
- / The entire cab (console) is fully suspended, with good sealing and less vibration, plus a suspended seat for great operating comfort.
- / The chassis elastic suspension technology and the long wheelbase design enable a great ride comfort.
- / The wide-view cab with an integral frame constituted by profiled steel pipes is flexibly connected to the body and has good sealing, sound insulation, vibration isolation and heat insulation, etc., so that the driver's comfort is improved. The large operating space and low boarding steps allow the operator to very easily get on and off the vehicle.
- / The forward and backward inclination angles of the hand wheel is adjustable and the seat can be adjusted by 150mm backwards and forwards, so that the operator can choose the best driving position.



Standard Specification

- / LED headlights (high-beam and low-beam)
- / Turn signal lights
- / Combination real LED operating light
- / Multi-function instrument cluster
- / Electric horn
- / Reverse buzzer
- / Ceiling light
- / USB interface
- / Boarding handle
- / Steering wheel adjusting device
- / Standard seat
- / Front wiper
- / Lithium iron phosphate battery
- / Reflective mirror
- / Jog switch
- / Large integral rubber pedal pads
- / Electric power-assisted synchronous steering system(20-32t)
- / Vacuum assisted hydraulic braking
- / Sunshade
- / Standard traction pin
- / Fully enclosed cab
- / Fully hydraulic steering system(35-40t)
- / Battery side roll out(35-40t)
- / Emergency stop switch

Environmental protection

- / Silence, no pollution, energy saving and other advantages meet environmental protection requirements.
- / Asbestos-free materials are used for the vehicle.

Maintainability

- / The wide-opened front hood, the easy-to-dismount electric controller hood plate, etc. make maintenance and commissioning very convenient.
- / The easy-to-dismount electric controller hood plate and the rear hood plate make the maintenance and commissioning of drive and electric control very convenient.

Options

- / Semi-enclosed cab
- / Heater
- / Suspended seat
- / OPS
- / Traction pin height scheme
- / Rear platform rail
- / Turning deceleration
- / Reversing video
- / Air conditioner
- / Battery charger
- / Fire extinguisher
- / Speed limit
- / Monitoring equipment
- / Windshield washer spray
- / Fan
- / Solid tyre
- / White non-marking solid tire



X Series Electric Tow Tractor Specification

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.		
	1.2	Manufacturer's type designation		QSD200-XD3-MI*	QSD250-XD3-MI*	QSD320-XD3-MI*
	1.5	Rated capacity/rated load	Q (kg)	20000	25000	32000
Weight	1.7	Rated drawbar pull	F (N)	10000	11000	12000
	1.9	Wheelbase	y (mm)	1710	1710	1710
	2.1	Service Weight	kg	3400	3600	3780
Tyres, chassis	2.2	Axle loading, front/rear	kg	930/2470	1010/2590	960/2820
	3.2	Tyre size, front		6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	3.3	Tyre size, rear		7.00-12-12PR	7.00-12-12PR	28×9-15-14PR
Dimensions	3.5	Wheels, number front / rear (x = driven wheels)		2/2	2/2	2/2
	3.6	Tread, front	b10 (mm)	1322	1322	1322
	3.7	Tread, rear	b11 (mm)	1280	1280	1260
Performance data	4.7	Height of overhead guard	h6 (mm)	1895	1895	1895
	4.12	Coupling height	h10 (mm)	450	450	450
	4.19	Overall length	l1 (mm)	3090	3090	3090
	4.21	Overall width	b1 (mm)	1480	1480	1480
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	120	120	120
Electric-engine	4.35	Turning radius	Wa (mm)	3350	3350	3350
	5.1	Travel speed, laden/unladen	km/h	- / 25	- / 25	- / 25
	5.5	Drawbar pull at 60 minute rating	N	10000	11000	12000
Electric-engine	5.7	Gradeability, laden/unladen	%	- / 33%	- / 33%	- / 33%
	5.10	Service brake		Hydraulic	Hydraulic	Hydraulic
	6.1	Drive motor rating S2 60 min	kW	23	30	30
Electric-engine	6.4	Battery voltage, nominal capacity K5	V/Ah	80.5/456	80.5/456	80.5/456
	6.5	Battery weight	kg	380	380	380



Note: * CE model

X Series High-voltage Lithium Battery Tow Tractor Specification


Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.		
	1.2	Manufacturer's type designation		QSD200-XS1-MIH	QSD250-XS1-MIH	QSD320-XS1-MIH
	1.5	Rated capacity/rated load	Q (kg)	20000	25000	32000
Weight	1.7	Rated drawbar pull	F (N)	10000	11000	12000
	1.9	Wheelbase	y (mm)	1710	1710	1710
	2.1	Service Weight	kg	3700	3840	4040
Tyres, chassis	2.2	Axle loading, front/rear	kg	1200/2500	1190/2650	1140/2900
	3.2	Tyre size, front		6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	3.3	Tyre size, rear		7.00-12-12PR	7.00-12-12PR	28×9-15-14PR
Dimensions	3.5	Wheels, number front / rear (x = driven wheels)		2/2	2/2	2/2
	3.6	Tread, front	b10 (mm)	1322	1322	1322
	3.7	Tread, rear	b11 (mm)	1260	1260	1260
Performance data	4.7	Height of overhead guard	h6 (mm)	1895	1895	1895
	4.12	Coupling height	h10 (mm)	450	450	450
	4.19	Overall length	l1 (mm)	3090	3090	3090
	4.21	Overall width	b1 (mm)	1480	1480	1480
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	120	120	120
Electric-engine	4.35	Turning radius	Wa (mm)	3350	3350	3350
	5.1	Travel speed, laden/unladen	km/h	- / 25	- / 25	- / 25
	5.5	Drawbar pull at 60 minute rating	N	10000	11000	12000
Electric-engine	5.7	Gradeability, laden/unladen	%	- / 33%	- / 33%	- / 33%
	5.10	Service brake		Hydraulic	Hydraulic	Hydraulic
	6.1	Drive motor rating S2 60 min	kW	30	30	30
Electric-engine	6.4	Battery voltage, nominal capacity K5	V/Ah	305.9/228	305.9/228	305.9/228
	6.5	Battery weight	kg	380	380	380

X Series Electric Tow Tractor Specification

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.	
	1.2	Manufacturer's type designation		QSD350-XC4-MI	QSD400-XC4-MI
	1.5	Rated capacity/rated load	Q (kg)	35000	40000
Weight	1.7	Rated capacity/rated load	Q (kg)	35000	40000
	1.9	Wheelbase	y (mm)	2230	2230
	2.1	Service weight	kg	4500	4720
Tyres, chassis	2.3	Axle loading, unladen front/rear	kg	1255/3245	1275/3445
	3.2	Tyre size, front		7.00-12-12PR	7.00-12-12PR
	3.3	Tyre size, rear		250-15-15PR	250-15-15PR
Dimensions	3.5	Wheels, number front/rear (x = driven wheels)		2/2x	2/2x
	3.6	Tread, front	b10 (mm)	1345	1345
	3.7	Tread, rear	b11 (mm)	1480	1480
Performance data	4.7	Height of overhead guard (cabin)	h6 (mm)	2130	2130
	4.12	Coupling height	h10 (mm)	450	450
	4.19	Overall length	l1 (mm)	3448	3448
	4.21	Overall width	b1/b2 (mm)	1746	1746
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	200	200
Electric-engine	4.35	Turning radius	Wa (mm)	3200	3200
	5.1	Travel speed, laden/unladen	km/h	-/21	-/21
	5.6	Max. drawbar pull, laden/unladen	N	31500	34000
Electric-engine	5.7	Gradeability, laden/unladen	%	-/33	-/33
	5.10	Service brake		Hydraulic	Hydraulic
	6.1	Drive motor rating S2 60 min	kW	35	35
Electric-engine	6.4	Battery voltage/nominal capacity K5	V/Ah	96/608	96/608

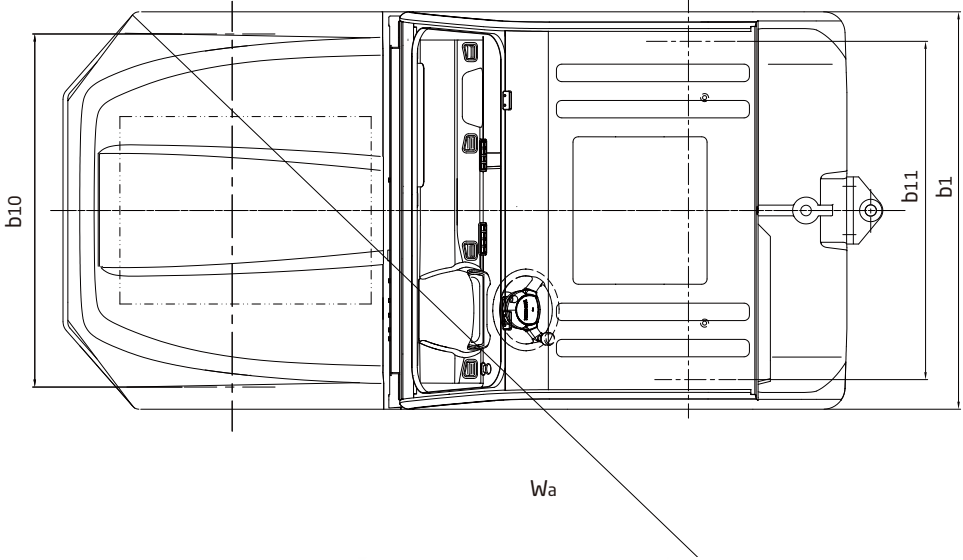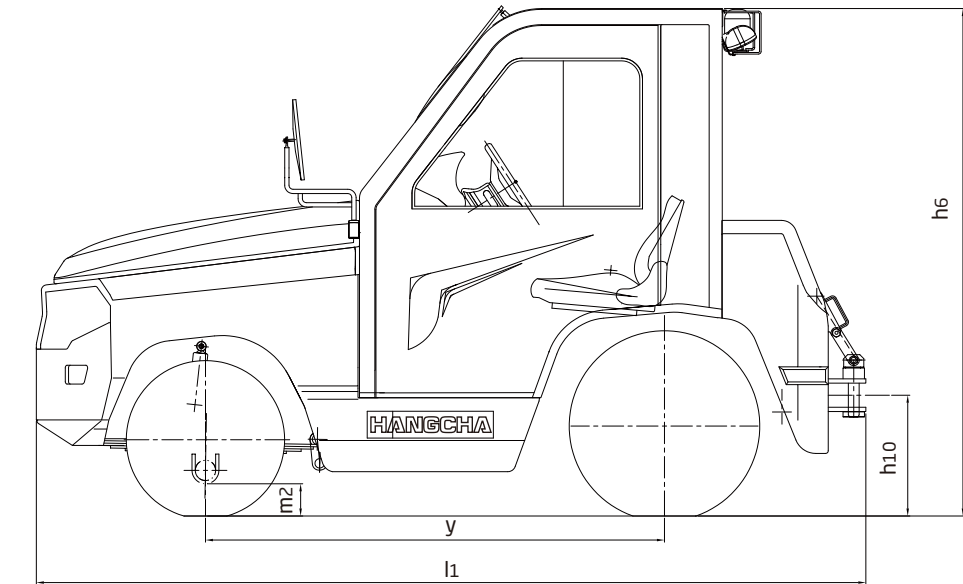

Traction weight kg/ ramp chart %

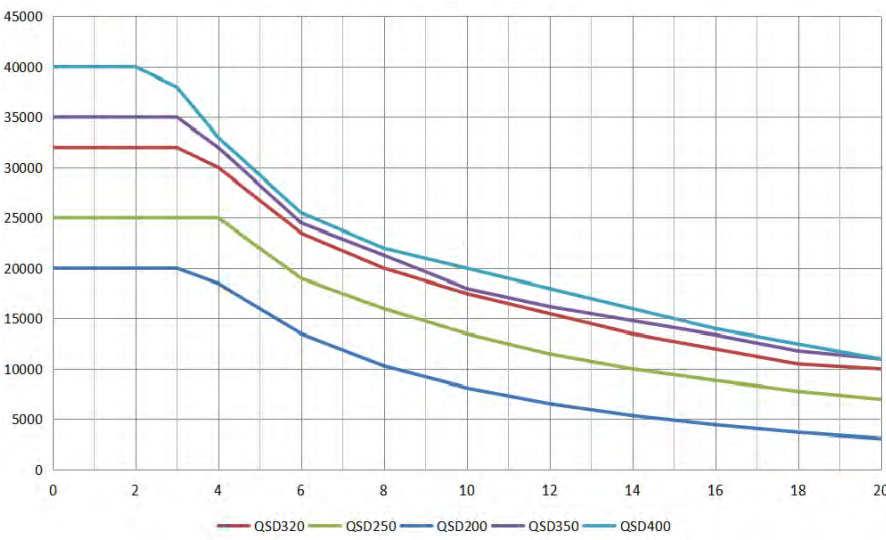

Note: The maximum towing weight shown in the table was measured on a dry, level concrete road surface with an adhesion coefficient of 0.8; it will vary as the road's adhesion coefficient changes.The towing mass in the table refers to the total towed load, including the trailer and its cargo. The figure is a theoretical value obtained on a dry, level concrete road surface with a trailer rolling-resistance coefficient of 0.015-0.018; the actual towing mass will also change with the road conditions and the trailer's rolling-resistance coefficient. If solid (cushion) tires are specified, use 85 % of the towing mass listed in the table.