



Hangcha Europe GmbH
Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management
Thomas Dittrich
Mob: 0049-16096548808
E-mail: thomas.dittrich@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com



Folgen Sie uns auf
Instagram



Folgen Sie uns auf
Facebook



Folgen Sie uns auf
YouTube



"Hangcha Forklift"
App herunterladen



ISO 14001:2015



ISO 9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dieser Broschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.



XH SERIES

HIGH-VOLTAGE TELEHANDLER

with capacity of 2,500 to 3,500kg

XH SERIES HIGH-VOLTAGE TELEHANDLER

HANGCHA Family-Design exterior, ergonomic cab, intuitive HMI system and premium driving comfort experience.

HIGH-PERFORMANCE MACHINES IN ANY SITUATION



With permanent magnet synchronous motor (PMSM) technology, can reach top speed: 25 km/h, maximum grade ability: 45%, and industry-leading performance in its class.



25 km/h
Drive speed [no load]



45%
Gradeability

THREE STEERING MODES:

4-Wheel Crab Steer



2-Wheel Front Steer



4-Wheel Circle Steer



TWO DRIVING MODES:

2WD
TWO-WHEEL DRIVE


4WD
FOUR-WHEEL DRIVE

The machine is equipped with quick change device, which can realize the quick replacement of different attachments. (Cargo fork, bucket, soft clamp, working platform, etc). This enables various operations including fork loading, shovel loading, clamping, aerial work, etc.

The first compact telehandler with 310V high-voltage lithium battery in industry, high voltage DC fast-charging technology. Make a charge from 30% to 80% only in 30 minutes.

310V
HIGH-VOLTAGE


Convenient charging solutions, two charging methods: DC fast-charging port and 10kW built-in charger.

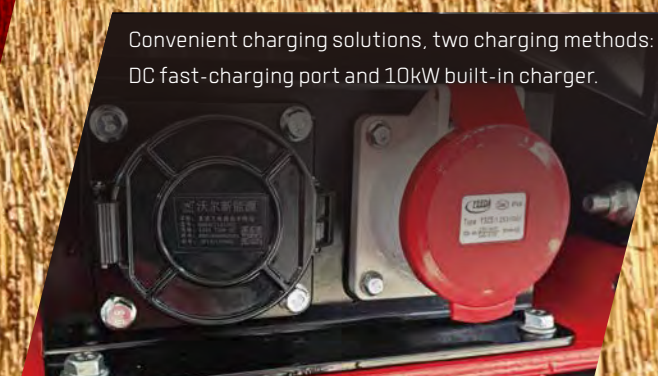

COMFORT

Driver assistance system and easy control

- 1 The cab can be equipped with air conditioning, radio, and USB charging port as option.
- 2 Adjustable suspension seat, more ergonomic.
- 3 Full-proportional joystick, smooth and coordinated movements, smooth and steady on start and stop, boom luffing and telescoping support compound movements.
- 4 7 inch display, real-time machine status monitoring, integrated intelligent fault diagnosis system.

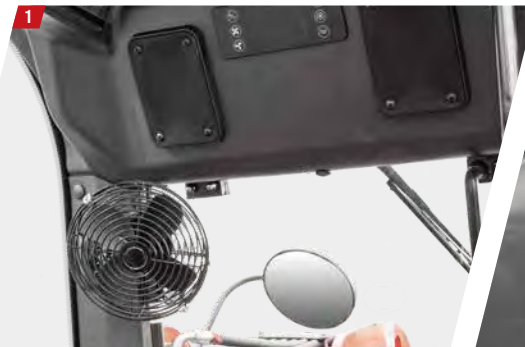

SAFETY

- Lithium iron phosphate battery pack---high safety & proven reliability.
- The lighting effect is excellent. In addition to high beam and low beam, the front and rear of the cab, and the boom are equipped with LED high-brightness work lights to ensure night scene operations.
- Equipped with a overload sensor system and dynamic monitoring, to prevent overturning and overloading, automatically stopping movement to avoid accidents.





MAINTENANCE

- The machine is equipped with a maintenance arm to prevent the risk of accidental fall of the arm frame during maintenance.
- Wide-angle tilting cover ensures easy maintenance access.



Technical data

Lifting capacity		Manufacturer	HANGCHA GROUP CO.,LTD.	
	Model		T25-60XHYG	T35-100XHYG
	Max.lift capacity	kg	2500	3500
	Lift capacity at maximum height	kg	2000	2500
	Lift capacity at maximum reach	kg	800	500
	Max. lifting height	mm	5800	9800
Dimensions and Weight	Max. forward reach	mm	3310	7000
	Center distance of rated load	mm	500	500
	A Front overhang	mm	1000	1240
	B Wheelbase	mm	2300	2750
	C Wheel truck	mm	1500	1850
	D Overall length(without forks)	mm	3950	5030
	E Fork length	mm	1070	1200
	F Overall height	mm	2020	2350
	G Overall width	mm	1820	2300
	H Cabin width	mm	810	940
	J Min. Ground clearance	mm	240	400
	K1 Tilt-up angle	°	12	12
	K2 Tilt-down angle	°	117	116
	L Min. turning radius	mm	3300	3700
	Overall weight	kg	5500	9600
Wheels	Tyre type		Vacuum tire	Vacuum tire
	Tyre spec		12-16.5-14PR /2	400/80-24
Performance parameters	Drive wheel x Steering wheel		4x4	4x4
	Frame leveling Angle	°	--	9
	Boom lower/raise angle	°	-2/68	-3.5/62
	Boom raising time（no-load）	s	11	15
	Boom lowering time （no-load）	s	8	10
	Extension time(no load)	s	9	17
	Retract time(no load)	s	9	16
	Fork backward time（no load）	s	4.5	6
	Fork forward time（no load）	s	4.5	6
	Frame leveling time (side to side)	s	/	10
	Max. travel speed (no load)	km/h	25	25
	Max. Drawbar pull	N	35000	50000
	Gradeability	%	45	45
Motor parameters	Drive motor power	kW	30	45
	Pump motor power	kW	35	35
Power parameters	Voltage	V	310	310
	Battery capacity	Ah	150	173
	Power	kWh	46	53
	Charger output power 1P220V	kW	3	3
	Charger output power 3P380V	kW	10	10

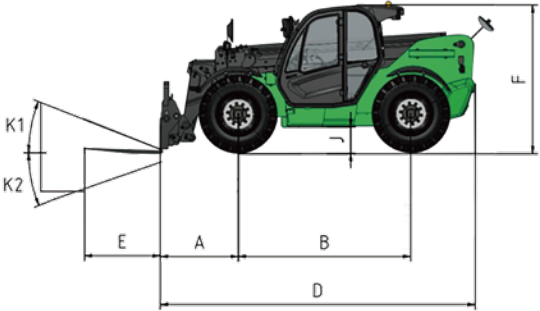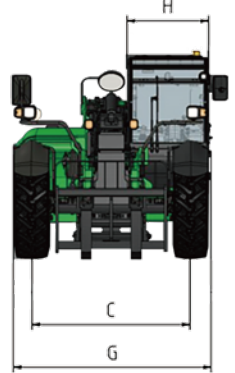

Features

Truck	Standard	Options
Air conditioner		○
Reverse or travel radar sensor		○
Rotating Amber beacon		○
Fire extinguisher in cabin or at rear		○
Full time rear camera		○
Quick exchange fork carriage	●	
Load backrest	●	
Adjustable suspension seat	●	
Flame retardant leather seats	●	
Traction device	●	
Load moment limiter Overload monitoring devise	●	
Left operable window	●	
Horn	●	
Key switch	●	
Wide angle L/R rearview mirrors	●	
Panoramic reversing mirror	●	
Front wiper with water spray function	●	
Rear window wiper	●	
High and low beam headlights	●	
Front and rear work lights	●	
Working light	●	
Reverse light	●	
Windshield protective frame		○
Fire Extinguisher		○
Foam filled tire		○
Quick change heavy Duty Multi-Purpose Bucket		○
Quick change soft bale clamp		○
Quick change crane arm		○
Forklift arm		○
Steering		
Three steering modes	●	
Adjustable steering column	●	
Hydraulic		
Hydraulic quick coupler	●	
Tilt cylinder self-locking valve	●	
Self locking valve for telescopic oil cylinder	●	
Lifting cylinder self-locking valve	●	
Lifting cylinder maintenance arm	●	
Hydraulic Oil Filter	●	
Hydraulic oil air filter	●	
Hydraulic oil dipstick	●	
Power		
2WD and 4WD switch function	●	
Three gears	●	
Transmission		
Wet brake	●	
Limited slip differential	●	
Hydraulic power steering	●	
Control		
Dual axis proportional control handle	●	
Emergency stop switch	●	
Parking brake	●	
Safety		
Warning light	●	
Reverse alarm	●	
Reverse camera		○
Reverse radar		○
Accept various attachments		
Fork-Mounted Extendable Truss		○
Fork-Mounted working platform		○
Bucket		○
Truss boom		○

Electronics	Standard	Options
Build-in charger	●	
DC fast charging port	●	
Fault self diagnosis function	●	
7-inch color multifunctional display screen	●	
Motor temperature display	●	
Warning lamp for not fastening the seat belt	●	
Water cooling system	●	
Heater	●	
Reading light	●	
Radio	●	
USB charge port	●	

